

MD50 设备触摸屏、显示屏及主板更换操作指南

MD50 device touch screen, display and mainboard replacement operation guide


步骤 1：使用电动螺丝刀（或螺丝刀）卸下固定后盖的 4 颗螺丝。

Step 1: Use an electric screwdriver (or screwdriver) to remove the 4 screws securing the back cover.



步骤 2：小心打开后盖，取出电池线和扬声器线。


Step 2: Carefully open the back cover and remove the battery cable and speaker cable.

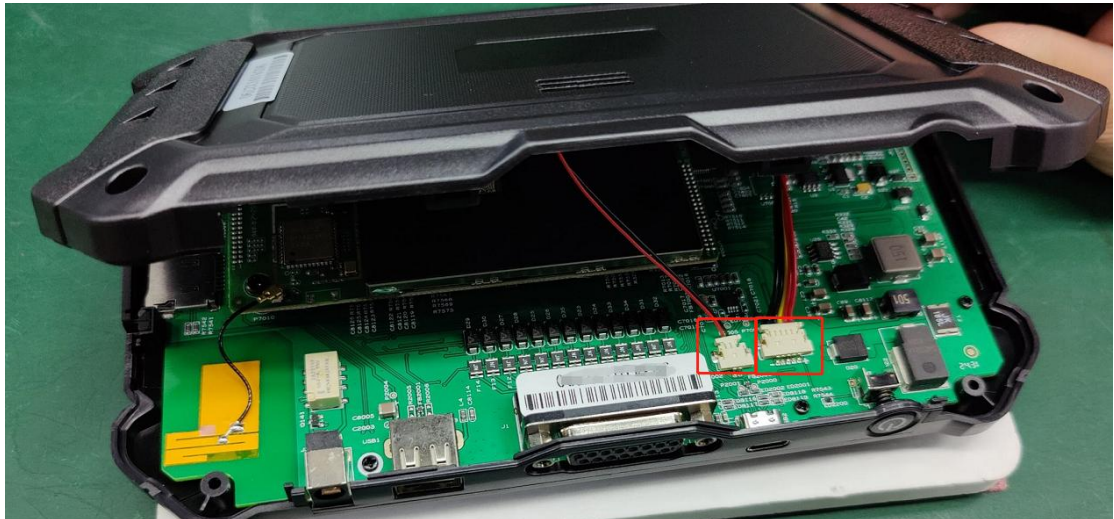

步骤 3: 使用电动螺丝刀 (或螺丝刀) 卸下 Android 主板上的 2 个固定螺丝。并用手拔下天线连接线。


Step 3: Use an electric screwdriver (or screwdriver) to remove the 2 fixing screws on the Android motherboard.

And unplug the antenna cable by hand.

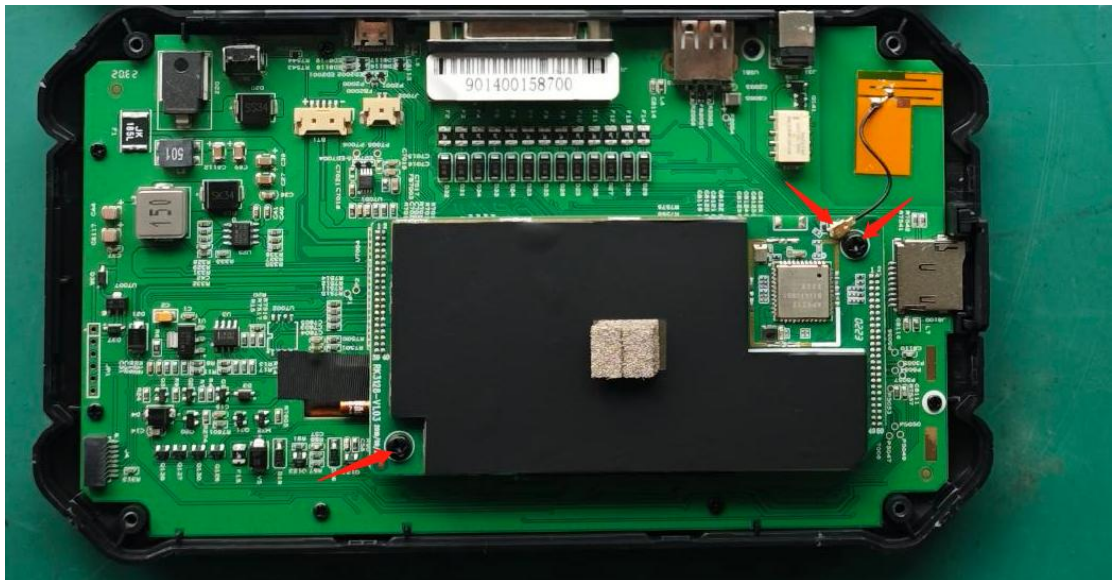


步骤 4: 抓住 Android 主板的两端，然后向上拉以将其拆下。

Step 4: Grasp both ends of the Android motherboard and pull it upward to remove it.

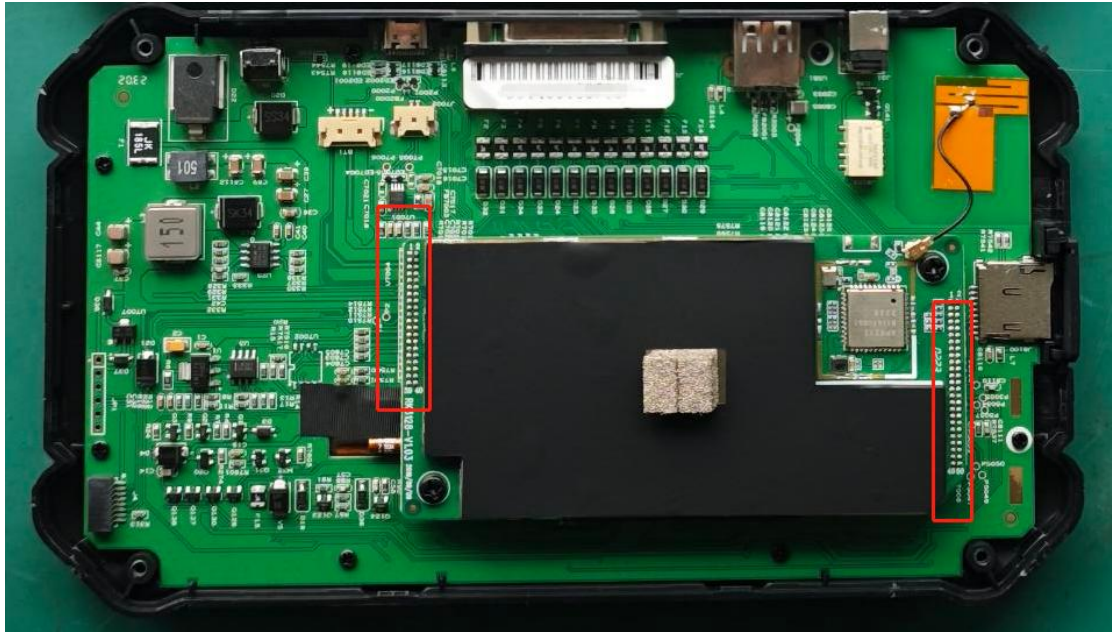


步骤 5: 卸下 VCI 主板上的固定螺丝。 撕掉触摸屏和显示屏排线上的醋酸布

Step 5: Remove the fixing screws on the VCI mainboard. Tear off the acetate cloth on the touch screen and display cable

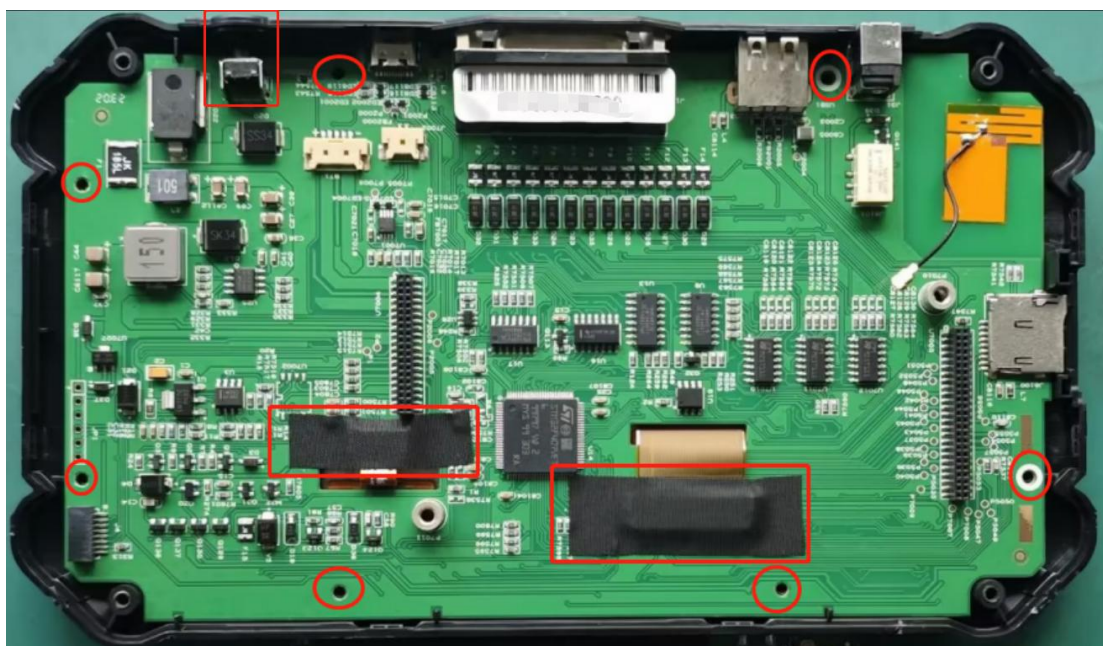


步骤 6: 取下电源开关按钮。向上摁打开显示屏和触摸屏排线固定卡，取出排线，
然后取出 VCI 主板。

Step 6: Remove the power switch button. Then lift it upwards, open the display and touch screen cable clips, remove the cable, and then remove the VCI mainboard.

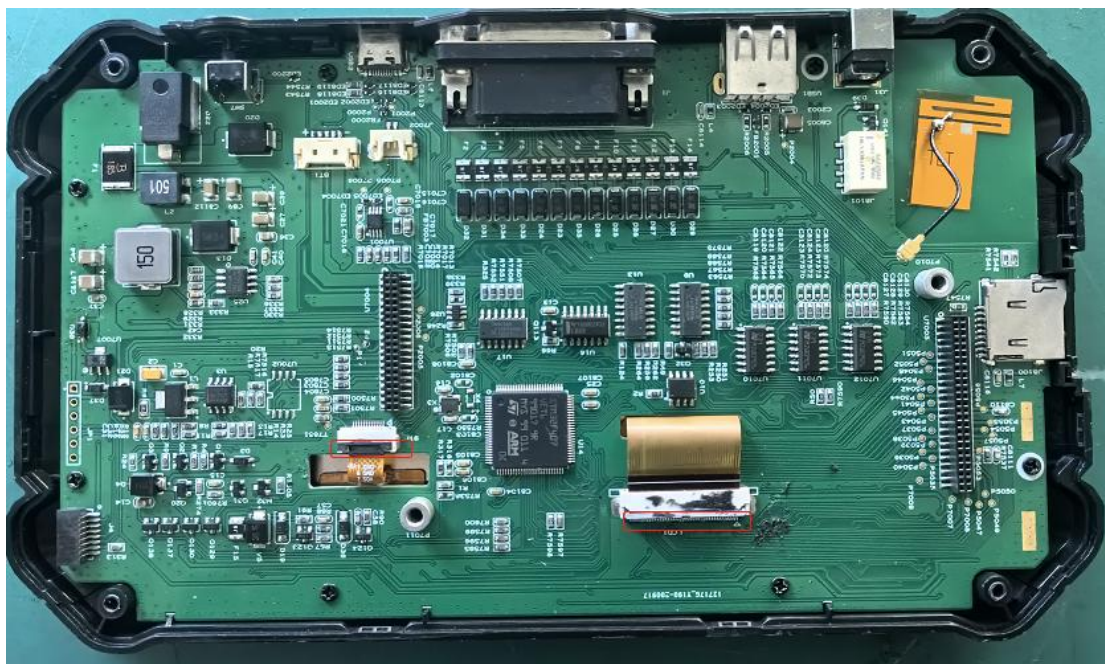


步骤 7: 撕掉醋酸布, 取下导光柱, 用手抵住显示屏定位卡扣, 取下显示屏。
 Step 7: Tear off the acetate cloth and remove the light guide. Use your hands to push open the display screen positioning latch and remove the display screen.

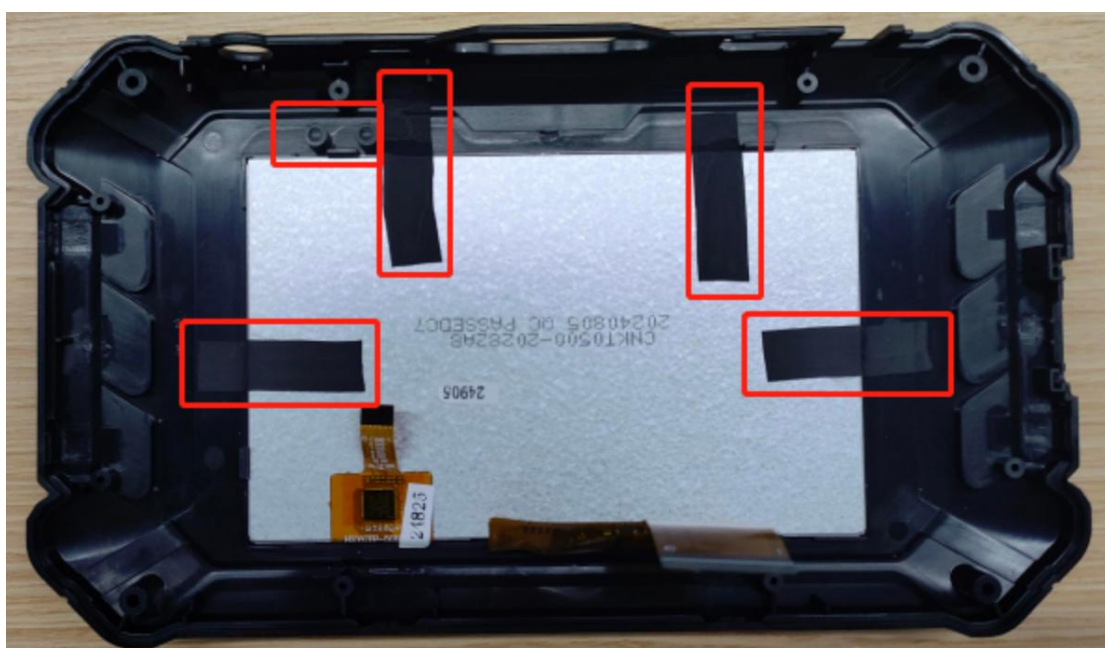




步骤 8: 更换新显示屏，装回醋酸纸和导光柱。

Step 8: Replace the new display screen and reinstall the acetate paper and light guide column.

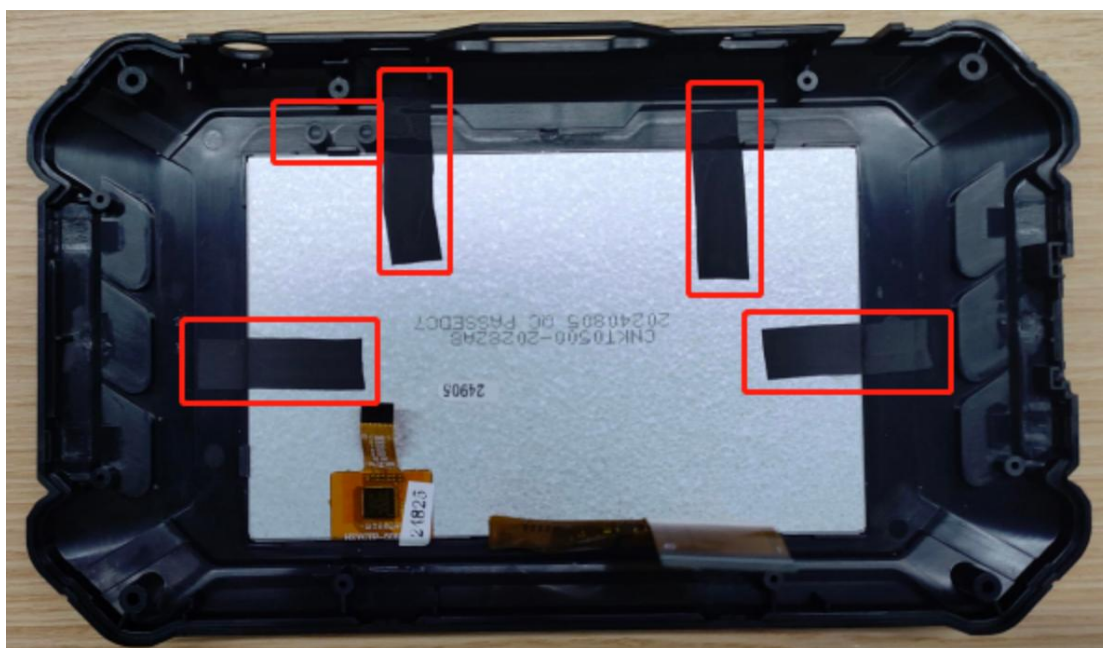


步骤 9：将显示屏和触摸屏排线从 VCI 主板中间穿过，通过机器上的定位螺丝，
将 VCI 主板对齐放入。

Step 9: Pass the display and touch screen cables through the middle of the VCI mainboard, and then align the VCI mainboard with the machine's locking screws and insert it.

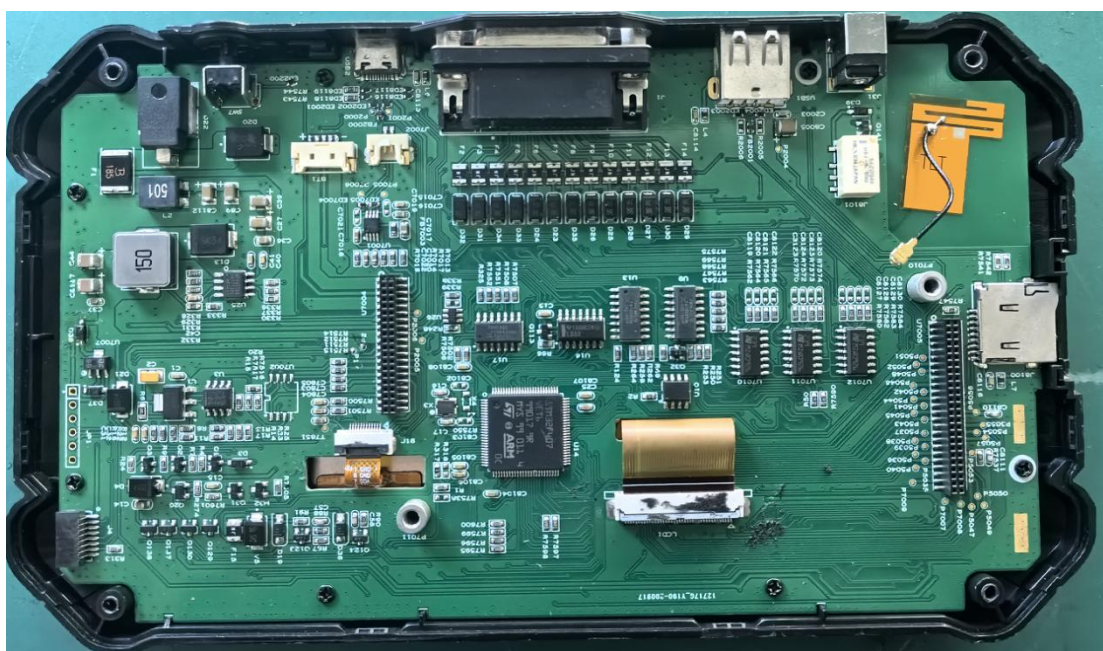


步骤 10: 装回 VCI 主板固定螺丝、电源开关和排线的醋酸纸。

Step 10: Reinstall the VCI mainboard fixing screws, power switch and cable acetate paper.

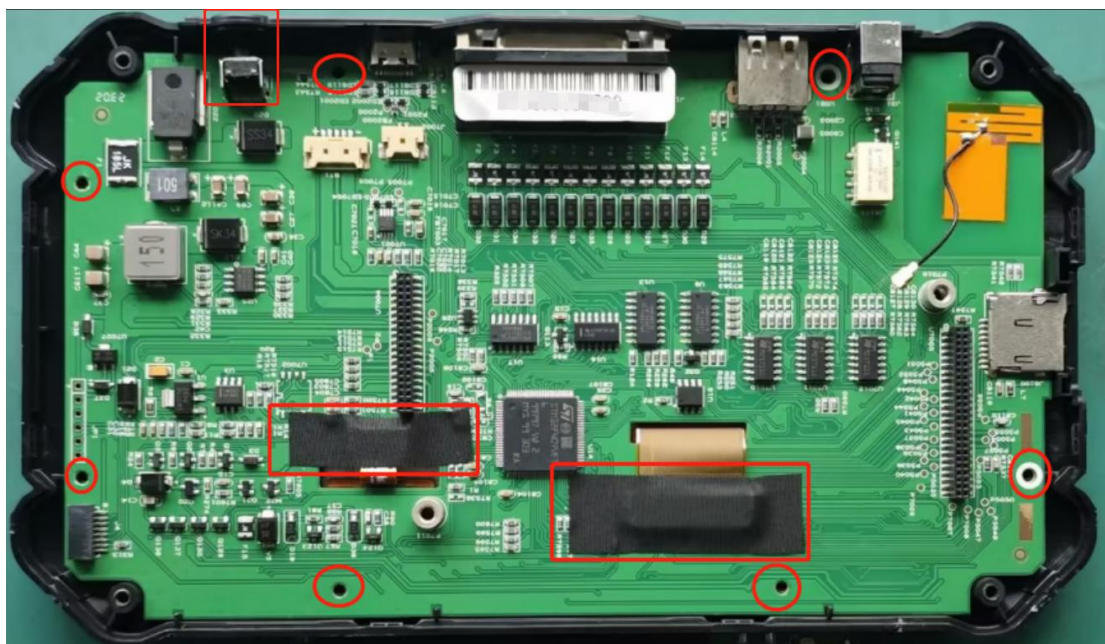


步骤 11: 将安卓主板插入 VCI 主板上，并安装固定螺丝和天线连接线。

Step 11: Insert the Android mainboard into the VCI mainboard and install the fixing screws and antenna clips.

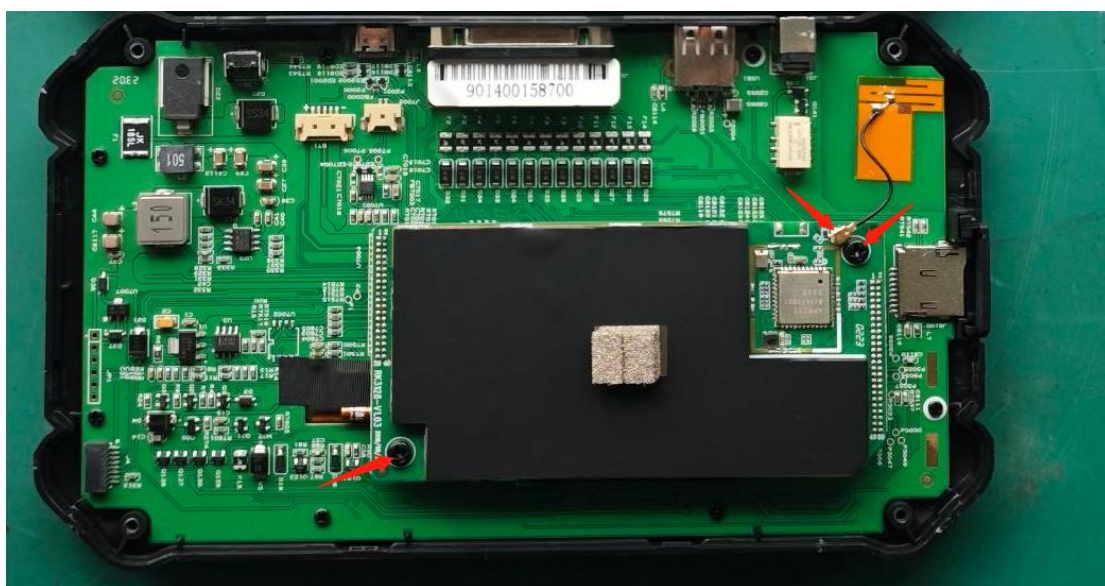

步骤 12: 安装电池线、扬声器线，盖上后盖。

Step 12: Install the battery cable and speaker cable, and close the back cover.

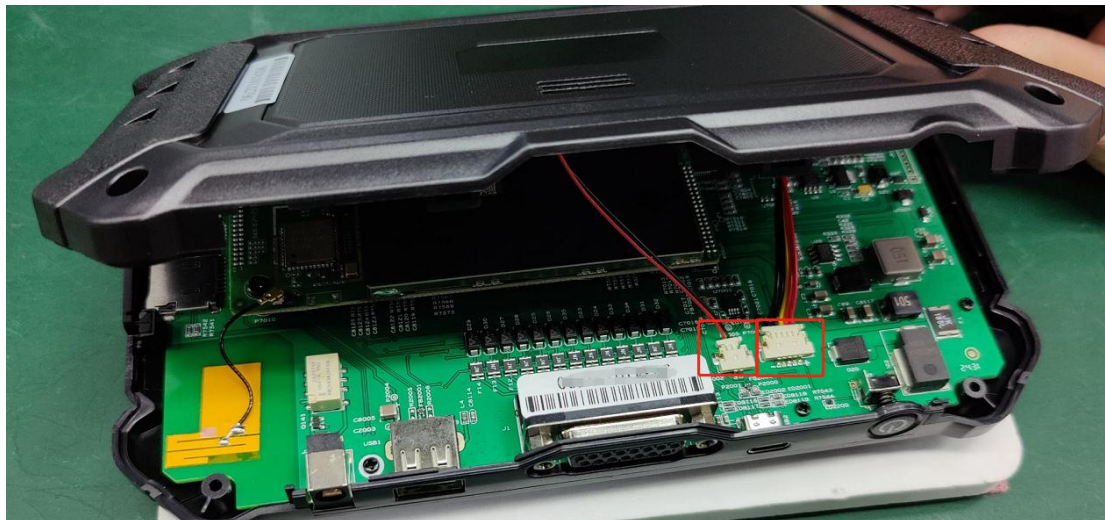

步骤 13: 装回后盖螺丝

Step 13: Put the rear cover screw back



注意：

1. 如果您更换安卓主板后，无法开机或有其他异常，请联系售后人员。，需要提供您的设备序列号信息
2. 如果您更换显示屏后，显示异常，请联系售后人员，需要提供您的设备序列号信息
3. 当您需要更换 VCI 主板时，请联系经销商同步您的账户信息，需要提供新旧 VCI 主板序列号

Note:

1. If you cannot boot or have other abnormalities after replacing the Android motherboard, please contact after-sales. You need to provide your device serial number;
2. If the display is abnormal after replacing the display screen, please contact after-sales and provide your device serial number;
3. When you need to replace the VCI motherboard, please contact the dealer to synchronize your account information and provide the serial numbers of the new and old VCI motherboards

(完)

(END)